


Features TO-C2B-W

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Use for wall stop, diverter, or deck diverter
- Rough valve (50-W-R, 75-W-R, WDV-R, DDV-R) sold separately





Codes/Standards

Product meets or exceeds the following:

ASME A112.18.1/CSA B125.1



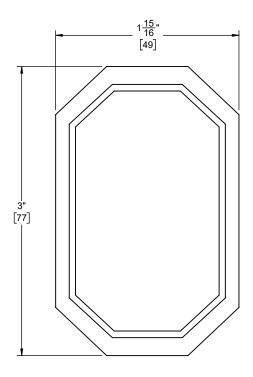

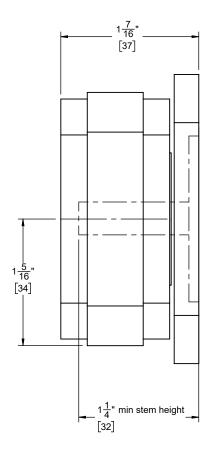

Through-Hole Specifications

RV Tam approving

<u>Min</u> Recommended <u>Max</u> Valve: Ø11/16" [17] Ø1-1/4" [32] Ø1-5/8" [41]

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]