KOHLER® FAUCETS

COROLAIS®

BATH FAUCET TRIM
K-T15290
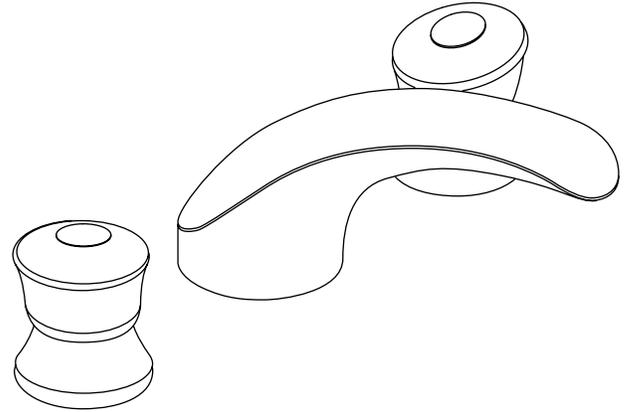**ALSO K-T15294**

Features

- *Brass construction*
- *Bath- or deck-mount*
- *5-1/2″ (14 cm) or 8″ (20.3 cm) non-diverter spouts with slip-fit connection*
- *Acrylic or lever handles*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *IAPMO/UPC*

Colors/Finishes

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Accessories

- NA: None applicable

Specified Model

Model	Description						
K-T15290-4	Bath faucet trim with lever handle, deck-mount	❏ CP	❏ PB	❏ Other_____			
K-T15290-7	Bath faucet trim with acrylic handle, deck-mount				❏ CP	❏ PB	❏ Other_____
K-T15294-4	Bath faucet trim with lever handle, bath-mount	❏ CP	❏ PB	❏ Other_____			
K-T15294-7	Bath faucet trim wit acrylic handle, bath-mount				❏ CP	❏ PB	❏ Other_____

Product Specification

Two-handle bath-or deck-mount high-flow bath faucet trim shall be of brass construction. Product shall include a 5-1/2″ (14 cm) or an 8″ (20.3 cm) non-diverter spout with slip-fit connection. Product shall include acrylic or lever handles. Bath faucet trim shall be Kohler Model K-T_____-_____-_____ and valve system shall be Kohler Model K-_____-_____-NA.
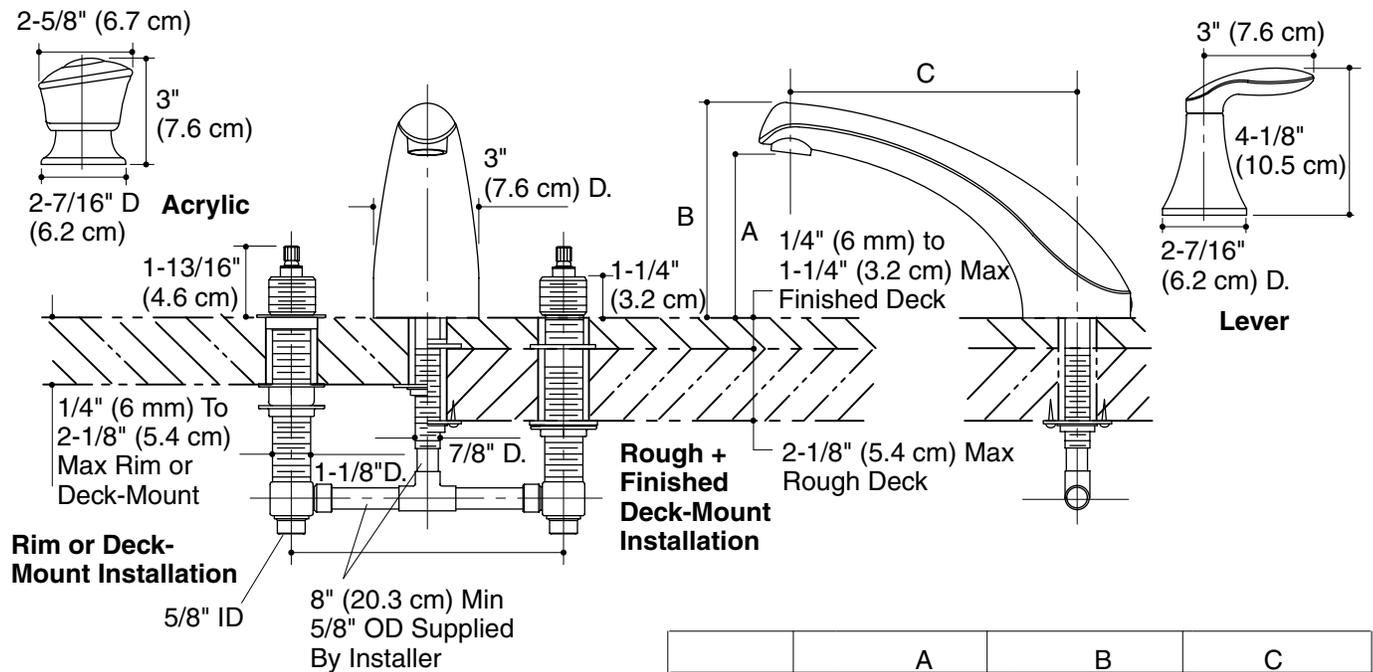
COROLAIS®

Required Accessories		
K-300-K	1/2″ high-flow ceramic disc valve system **OR**	❏ NA
K-300-KR	1/2″ high-flow ceramic disc valve system with rigid connections **OR**	❏ NA
K-301-K	3/4″ high-flow ceramic disc valve system	❏ NA

Optional Accessories		
73102	Deep roughing-in kit for high-flow deck-mount bath faucets (all handles)	❏ NA
73444	Deep roughing-in kit for high-flow deck-mount bath faucets (all handles)	❏ NA

Installation Notes

Install this product according to the installation guide.

2-5/8" (6.7 cm)

3" (7.6 cm)

2-7/16" D (6.2 cm) **Acrylic**

3" (7.6 cm)

4-1/8" (10.5 cm)

2-7/16" (6.2 cm) D.

Lever

1-13/16" (4.6 cm)

3" (7.6 cm) D.

1-1/4" (3.2 cm)

C

B

A

1/4" (6 mm) to 1-1/4" (3.2 cm) Max Finished Deck

1/4" (6 mm) To 2-1/8" (5.4 cm) Max Rim or Deck-Mount

1-1/8"D.

7/8" D.

Rough + Finished Deck-Mount Installation

2-1/8" (5.4 cm) Max Rough Deck

Rim or Deck-Mount Installation

5/8" ID

8" (20.3 cm) Min 5/8" OD Supplied By Installer

	A	B	C
K-T15290	4-5/8" (11.7 cm)	6" (15.2 cm)	8" (20.3 cm)
K-T15294	3-1/2" (8.9 cm)	4-7/8" (12.4 cm)	5-1/2" (14 cm)

Product Diagram

THE BOLD LOOK OF **KOHLER**.