

## Eco Promenade® Close Coupled Toilet, 1.28GPF

### FEATURES

- E-Max® flushing system, low consumption (1.28GPF/4.8LPF)
- Universal Height
- Optional CeFiONtect™ ceramic glaze - prevents debris and mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Decorative two-piece design with high-profile tank
- Chrome trip lever

### MODELS

- CST424EFG  
With CeFiONtect ceramic glaze
- CST424EF  
Less CeFiONtect

### COMPONENTS

- C424EFG  
Elongated bowl with CeFiONtect
- C424EF  
Elongated bowl less CeFiONtect
- ST424E  
Tank and cover only
- SS114 SoftClose® seat (sold separately)
- SS304 SoftClose® maple seat (sold separately)
- SS154 seat (sold separately)

### COLORS/FINISHES

- Standard
  - #01 Cotton
  - #03 Bone
  - #11 Colonial White
  - #12 Sedona Beige
  - #51 Ebony (not available with CeFiONtect)

### PRODUCT SPECIFICATION

The two-piece low consumption E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be universal height and ADA compliant when approached from trip lever side. CST424EFG model shall have CeFiONtect ceramic glaze. Toilet shall be TOTO Model CST424EF \_\_\_\_\_.



### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



# CST424EF(G)

## Eco Promenade® Close Coupled Toilet, 1.28GPF

### SPECIFICATIONS



- Water Use 1.28 GPF/4.8LPF
- Flush System E-Max
- Min. Water Pressure 8 psi (static)
- Water Surface 8-7/8" x 6-3/8"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/4"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C424EF - 54lbs  
ST424E - 41.5lbs
- Shipping Dimensions C424EF(G)  
28"L x 10"W<sup>1</sup> x 16-1/4"W<sup>2</sup>  
x 17-1/4"H

ST424E  
20-1/2" L x 9-1/2" W  
x 21-3/4" H

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

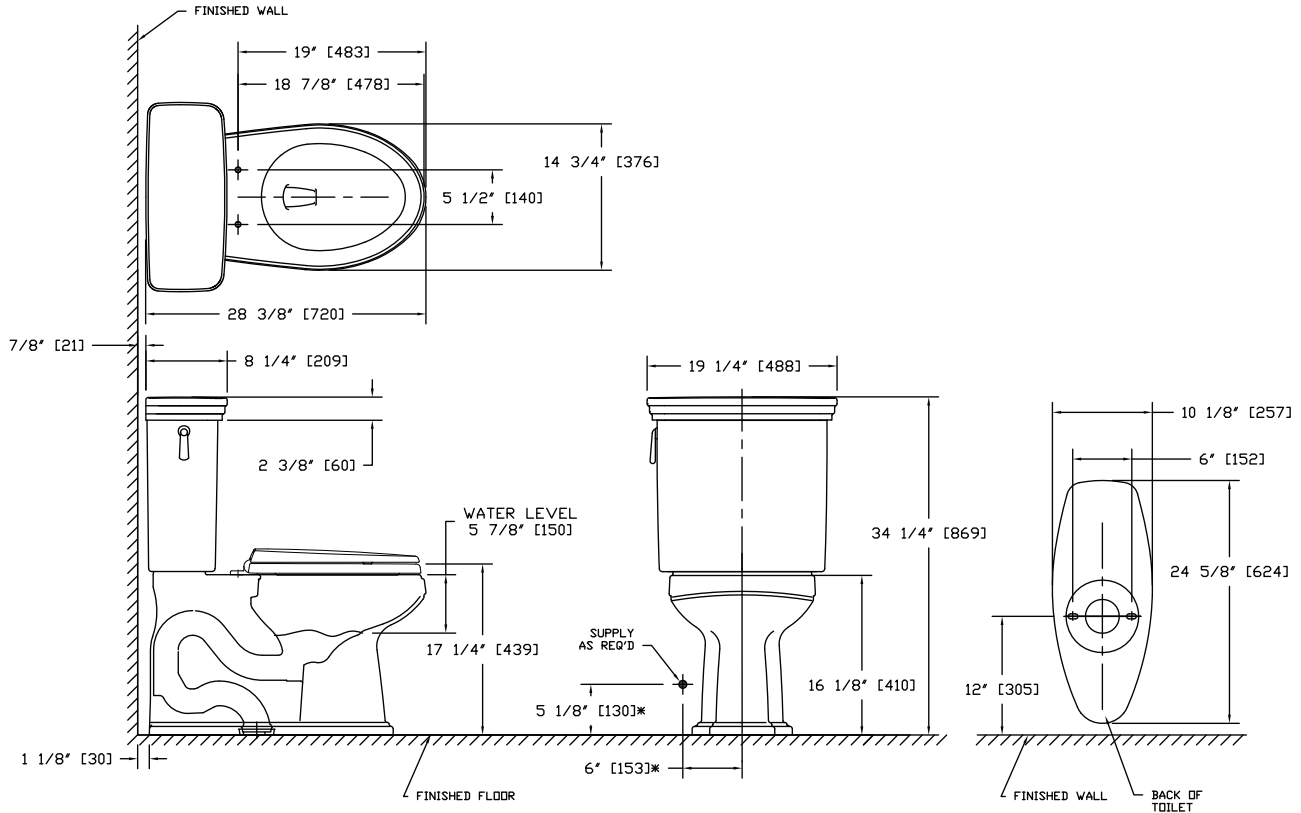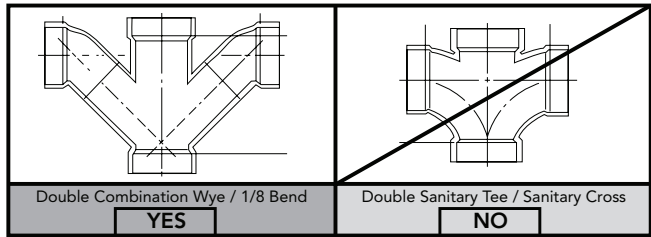

\*SUGGESTED DIMENSIONS

**TOTO**

These dimensions and specifications are subject to change without notice