



### HANDLE TRIMS


#### Norwood (Code: TR24)

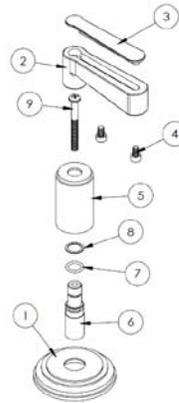


ITEM NO.	PART NUMBER	QTY.
1	TR24-ESC	1
2	TR14-LVR-BTMM	1
3	TR14-LVR-CAP	1
4	HX-SHCS 0.164-32x0.25x0.25-S	2
5	TR24-POST	1
6	TR24-STEM	1
7	AS568 - 012	1
8	.497x.391x.02-PLSTC-WSHR	1
9	CR-PHMS 0.164-32x1.625x1-S	1



#### Union (Code: TR25)

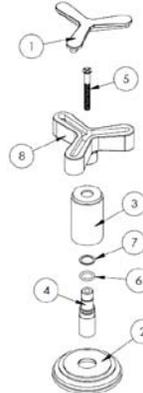

ITEM NO.	PART NUMBER	QTY.
1	TR15-CRSS-HNDL-CAP	1
2	TR24-ESC	1
3	TR24-POST	1
4	TR24-STEM	1
5	CR-FHMS 0.164-32x1.5x1-S	1
6	AS568 - 012	1
7	.497x.391x.02-PLSTC-WSHR	1
8	TR15-CRSS-HNDL-BTMM_R1	1



### Specification from Finished Wall to Tip of Broach Stem

HANDLE TRIM #	MEASUREMENT (IN.)
TR24/ TR25	2 1/8

Note: When fitting handle it may be necessary to shorten broach stem and/or threaded nipple to eliminate gap between handle and escutcheon

#### **IMPORTANT INSTALLATION INFORMATION**

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS  
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING  
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

**For technical support, please call 718-257-2800**